

Hybrid GEN²

B+BTec DesignFix®

TDS BIS-HY GEN2
SLEEVES 0131.0519.01




Hybrid Injection Adhesive
ETA Option 1 Assessed
for Cracked & Non-Cracked
Concrete



Threaded Inserts IG-M6 to IG-M16

- Steel 5.8 and 8.8 Zinc Plated and Hot Dip Galvanized
- Stainless Steel A4-50 and A4-70
- High Corrosion Resistant Steel 1.4529




Features

- **NEW!** ETA Assessed for the Installation in Flooded Holes
- **NEW!** No Cleaning required for Hollow Drilling
- **NEW!** Extended Seismic C2 Range: M12 - M24
- For Extreme Loads
- Fast Curing
- Styrene Free
- Low VOC: A+ Rating
- Fire Rated
- Leed Tested
- Potable Water Approved
- B+BTec DesignFix® support

Use Conditions

- Installation in Cracked & Non-Cracked Concrete C20/25 to C50/60
- For Anchor Rods M8-M30, Rebar Ø8-32 mm and Threaded Sleeves M6-M20
- Seismic Action C1: M8-M30, Ø8-32 mm
- Seismic Action C2: M12 - M24
- For Hammer/Air drilled Holes
- Installation in Dry and Wet Holes
- Installation in Flooded Holes
- Overhead Installation allowed.

Approvals & Test Reports

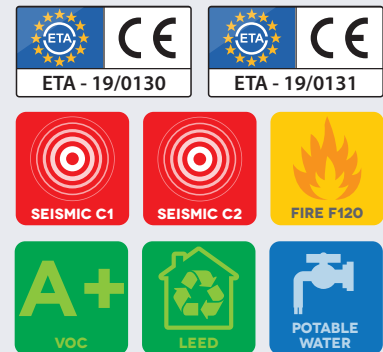

Temperature Range

B+BTec BIS-HY GEN2 injection mortar may be applied in the temperature ranges given below. An elevated base material temperature leads to a reduction of the bond resistance.


Max. long term base material temperature: Long term elevated base material temperatures are roughly constant over significant periods of time.

Max. short term base material temperature: Short term elevated base material temperatures are those that occur over brief intervals, e.g. as a result of diurnal cycling.


| Temperature Range | Temperature Base Material | Max. Long Term Base Material Temperature | Max. Short Term Base Material Temperature |
|-------------------|---------------------------|--|---|
| Temp. Range I | -40°C to +80°C | + 50°C | +80°C |
| Temp. Range II | -40°C to +120°C | +72°C | +120°C |
| Temp. Range III | -40°C to +160°C | +100°C | +160°C |

Installation Procedures (Hand Pump Cleaning)


Hand Pump Cleaning for bore hole diameter $d_0 \leq 20\text{mm}$, bore hole depth $h_0 \leq 10d_{\text{nom}}$ and Non-Cracked Concrete only.

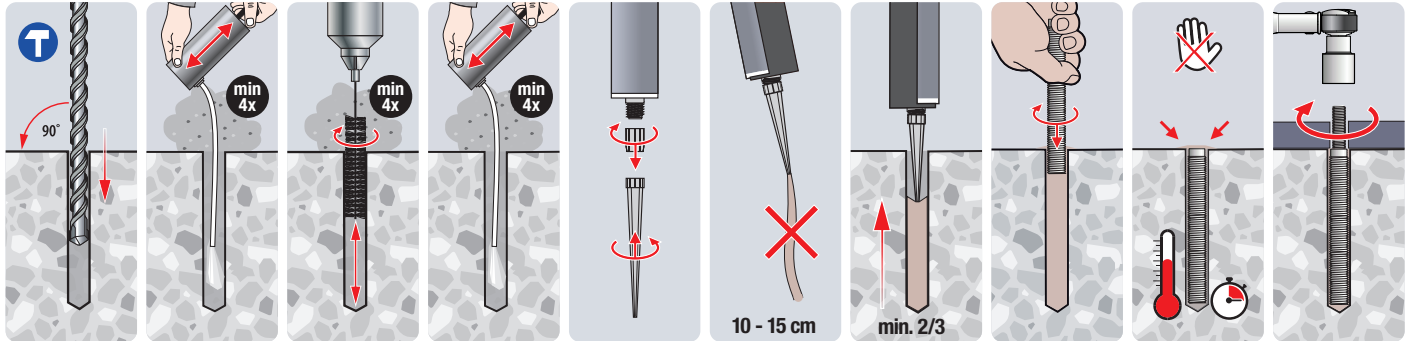

Installation Procedures (Compressed Air Cleaning)

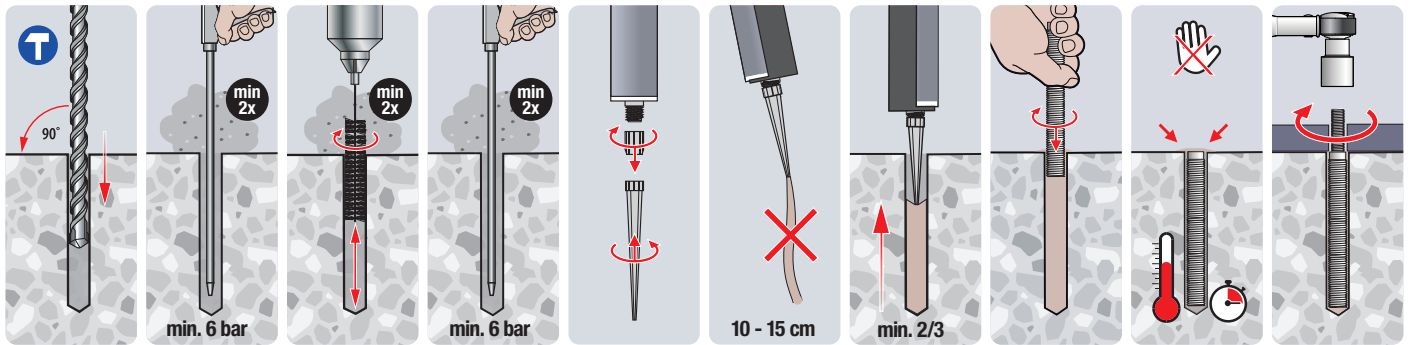

Installation Procedures (Hollow Drilling)

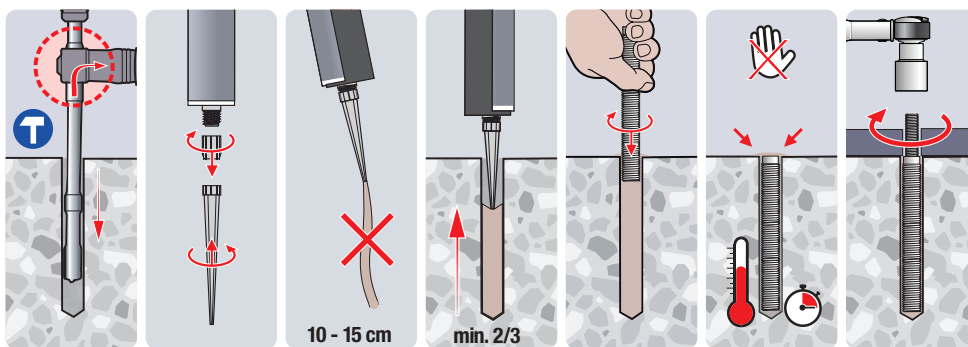


Curing Times¹⁾

| Temperature ²⁾ | °C | -5 to -1 | 0 to +4 | +5 to +9 | +10 to +14 | +15 to +19 | +20 to +29 | +30 to +40 |
|---------------------------|----|----------|---------|----------|------------|------------|------------|------------|
| Processing Time | | 50 min | 25 min | 15 min | 10 min | 6 min | 3 min | 2 min |
| Curing Time Dry Holes | | 5 h | 3,5 h | 2 h | 1h | 40 min | 30 min | 30 min |
| Curing Time Wet Holes | | 10 h | 7 h | 4 h | 2h | 80 min | 60 min | 60 min |

1) Cartridge Temperature must be between +5°C and +40°C. 2) Concrete Temperature



Specification Data for the use in Cracked & Uncracked Concrete and Hammer/Air Drilled Holes according to EN 1992-4:2018 and Technical Report TR 055

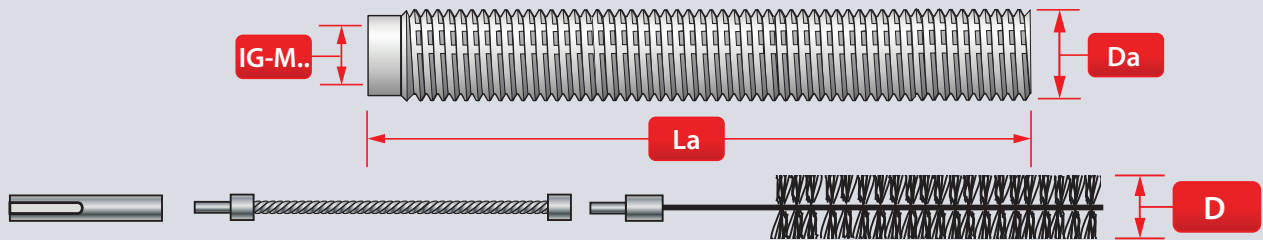



Installation Dimensions

| Anchor Size | D_a | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|---|----------------------|-------|-------|--------|--------|--------|
| Anchorage Depth for Calculation ¹⁾ | $h_{ef,calc}$ [mm] | 90 | 100 | 100 | 125 | 170 |
| Outer Diameter of Sleeve ²⁾ | $d=d_{nom}$ [mm] | 10 | 12 | 16 | 20 | 24 |
| Hole Diameter | d_0 [mm] | 12 | 14 | 18 | 22 | 28 |
| Diameter of Clearance Hole in the Fixture | d_f [mm] | 7 | 9 | 12 | 14 | 18 |
| Thread Engagement Length Min./Max. | h_s [mm] | 8/20 | 8/20 | 10/25 | 12/30 | 16/32 |
| Max. Torque Moment ³⁾ | $T_{inst} \leq$ [Nm] | 10 | 10 | 20 | 40 | 60 |
| Required Volume per cm Embedment Depth | V_s [ml/cm] | 0,59 | 0,75 | 1,09 | 2,25 | 2,87 |

1) Other dimensions than the stated $h_{ef,calc}$ upon request.

2) With metric threads according to EN 1993-1-8:2005+AC:2009

3) Max. recommended torque moment to avoid splitting failure during installation with minimum spacing and edge distance

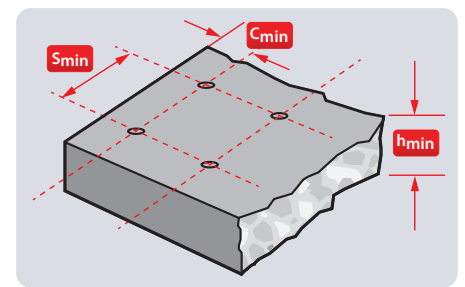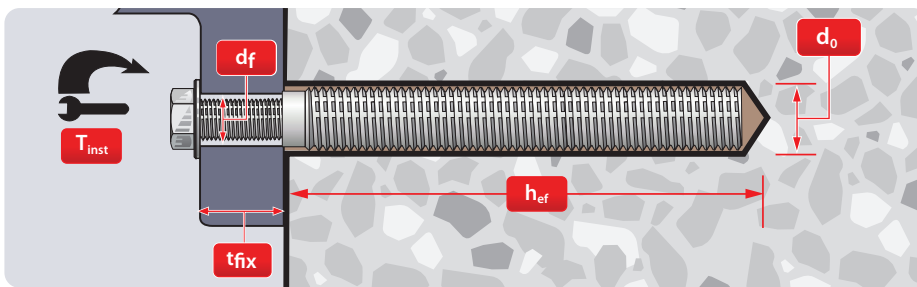

Member Thickness, Edge Distance & Spacing

| Anchor Size | D_a | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|-----------------------|----------------|--|-------|--------|-----------------|--------|
| Min. Member Thickness | h_{min} [mm] | $h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$ | | | $h_{ef} + 2d_0$ | |
| Min. Edge Distance | C_{min} [mm] | 40 | 45 | 50 | 60 | 65 |
| Min. Spacing | S_{min} [mm] | 50 | 60 | 75 | 95 | 115 |


Steel Brush Dimensions

| Anchor Size | D _a | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|---------------------|------------------------|------|------------------|-------|--------|--------|--------|
| Brush Diameter | D | [mm] | 13,5 | 15,5 | 20 | 24 | 30 |
| Min. Brush Diameter | D_{min} | [mm] | 12,5 | 14,5 | 18,5 | 22,5 | 28,5 |
| Piston Plug | # | [-] | No plug required | | 18 | 22 | 28 |

Static and quasi-static resistance (for a single anchor)

All data in this section subject to:

- Correct setting (see setting instructions).
 - No edge distance and spacing influence.
 - Standard embedment depth ($h_{ef,calc}$), as specified in the 'Installation Dimensions' table.
 - Concrete C20/25, $f_{ck,cube} = 25 \text{ N/mm}^2$.
 - Temperature range I: (max. long/short term temperature +50°C/+80°C).
 - Shear loads are calculated without the influence of a lever arm.
 - Fastening (incl. nut and washer) complies with the appropriate material and property class of the internal threaded rod.
 - Recommended loads are with overall partial safety factor for action $\gamma_G = 1,4$.
- The partial safety factors for action depend on the type of loading and shall be taken from national regulations.
- Increasing factors for concrete ψ_c : C25/30 = **1,02** C30/37 = **1,04** C35/45 = **1,07** C40/50 = **1,08** C45/55 = **1,09** C50/60 = **1,10**



Design Resistance Dry/Wet Holes (Compressed Air Cleaning)

Steel Decisive

| Non-Cracked Concrete | | D _a | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|----------------------|---------|-----------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{Rd} | [kN] | 6,7 | 11,3 | 19,3 | 28,0 | 50,7 |
| | Shear | V_{Rd} | [kN] | 4,0 | 7,2 | 12,0 | 16,8 | 30,4 |
| A4-70 | Tensile | N_{Rd} | [kN] | 7,5 | 13,9 | 21,9 | 31,6 | 58,8 |
| | Shear | V_{Rd} | [kN] | 4,5 | 8,3 | 12,8 | 19,2 | 35,3 |

| Cracked Concrete | | D _a | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|------------------|---------|-----------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{Rd} | [kN] | 6,7 | 11,3 | 19,3 | 28,0 | 50,7 |
| | Shear | V_{Rd} | [kN] | 4,0 | 7,2 | 12,0 | 16,8 | 30,4 |
| A4-70 | Tensile | N_{Rd} | [kN] | 7,5 | 13,9 | 21,9 | 31,6 | 53,2 |
| | Shear | V_{Rd} | [kN] | 4,5 | 8,3 | 12,8 | 19,2 | 35,3 |

Design Resistance Dry/Wet Holes (Hollow Drilling)

Steel Decisive

| Non-Cracked Concrete | | D _α | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|----------------------|---------|-----------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{Rd} | [kN] | 6,7 | 11,3 | 19,3 | 28,0 | 50,7 |
| | Shear | V_{Rd} | [kN] | 4,0 | 7,2 | 12,0 | 16,8 | 30,4 |
| A4-70 | Tensile | N_{Rd} | [kN] | 7,5 | 13,9 | 21,9 | 31,6 | 58,8 |
| | Shear | V_{Rd} | [kN] | 4,5 | 8,3 | 12,8 | 19,2 | 35,3 |


| Cracked Concrete | | D _α | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|------------------|---------|-----------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{Rd} | [kN] | 6,7 | 11,3 | 19,3 | 28,0 | 44,3 |
| | Shear | V_{Rd} | [kN] | 4,0 | 7,2 | 12,0 | 16,8 | 30,4 |
| A4-70 | Tensile | N_{Rd} | [kN] | 7,5 | 13,9 | 20,0 | 28,0 | 44,3 |
| | Shear | V_{Rd} | [kN] | 4,5 | 8,3 | 12,8 | 19,2 | 35,3 |

Design Resistance Flooded Holes

Steel Decisive

| Non-Cracked Concrete | | D _α | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|----------------------|---------|-----------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{Rd} | [kN] | 6,7 | 11,3 | 19,3 | 28,0 | 50,7 |
| | Shear | V_{Rd} | [kN] | 4,0 | 7,2 | 12,0 | 16,8 | 30,4 |
| A4-70 | Tensile | N_{Rd} | [kN] | 7,5 | 13,9 | 21,9 | 31,6 | 53,3 |
| | Shear | V_{Rd} | [kN] | 4,5 | 8,3 | 12,8 | 19,2 | 35,3 |

| Cracked Concrete | | D _α | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|------------------|---------|-----------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{Rd} | [kN] | 6,7 | 11,3 | 17,1 | 24,0 | 38,0 |
| | Shear | V_{Rd} | [kN] | 4,0 | 7,2 | 12,0 | 16,8 | 30,4 |
| A4-70 | Tensile | N_{Rd} | [kN] | 7,5 | 13,9 | 17,1 | 24,0 | 38,0 |
| | Shear | V_{Rd} | [kN] | 4,5 | 8,3 | 12,8 | 19,2 | 35,3 |



Recommended Loads Dry/Wet Holes (Compressed Air Cleaning)

| Non-Cracked Concrete | | D _a | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|----------------------|---------|------------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{rec} | [kN] | 4,8 | 8,1 | 13,8 | 20,0 | 36,2 |
| | Shear | V_{rec} | [kN] | 2,9 | 5,1 | 8,6 | 12,0 | 21,7 |
| A4-70 | Tensile | N_{rec} | [kN] | 5,3 | 9,9 | 15,7 | 22,5 | 42,0 |
| | Shear | V_{rec} | [kN] | 3,2 | 6,0 | 9,2 | 13,7 | 25,2 |

| Cracked Concrete | | D _a | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|------------------|---------|------------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{rec} | [kN] | 4,8 | 8,1 | 13,8 | 20,0 | 36,2 |
| | Shear | V_{rec} | [kN] | 2,9 | 5,1 | 8,6 | 12,0 | 21,7 |
| A4-70 | Tensile | N_{rec} | [kN] | 5,3 | 9,9 | 15,7 | 22,5 | 38,0 |
| | Shear | V_{rec} | [kN] | 3,2 | 6,0 | 9,2 | 13,7 | 25,2 |

Recommended Loads Dry/Wet Holes (Hollow Drilling)

| Non-Cracked Concrete | | D _a | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|----------------------|---------|------------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{rec} | [kN] | 4,8 | 8,1 | 13,8 | 20,0 | 36,2 |
| | Shear | V_{rec} | [kN] | 2,9 | 5,1 | 8,6 | 12,0 | 21,7 |
| A4-70 | Tensile | N_{rec} | [kN] | 5,3 | 9,9 | 15,7 | 22,5 | 42,0 |
| | Shear | V_{rec} | [kN] | 3,2 | 6,0 | 9,2 | 13,7 | 25,2 |

| Cracked Concrete | | D _a | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|------------------|---------|------------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{rec} | [kN] | 4,8 | 8,1 | 13,8 | 20,0 | 31,7 |
| | Shear | V_{rec} | [kN] | 2,9 | 5,1 | 8,6 | 12,0 | 21,7 |
| A4-70 | Tensile | N_{rec} | [kN] | 5,3 | 9,9 | 14,3 | 20,0 | 31,7 |
| | Shear | V_{rec} | [kN] | 3,2 | 6,0 | 9,2 | 13,7 | 25,2 |

Recommended Loads Flooded Holes

| Non-Cracked Concrete | | D _a | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|----------------------|---------|------------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{rec} | [kN] | 4,8 | 8,1 | 13,8 | 20,0 | 36,2 |
| | Shear | V_{rec} | [kN] | 2,9 | 5,1 | 8,6 | 12,0 | 21,7 |
| A4-70 | Tensile | N_{rec} | [kN] | 5,3 | 9,9 | 15,7 | 22,5 | 38,1 |
| | Shear | V_{rec} | [kN] | 3,2 | 6,0 | 9,2 | 13,7 | 25,2 |

| Cracked Concrete | | D _a | | IG-M6 | IG-M8 | IG-M10 | IG-M12 | IG-M16 |
|------------------|---------|------------------------|------|-------|-------|--------|--------|--------|
| Steel 5.8 | Tensile | N_{rec} | [kN] | 4,8 | 8,1 | 12,2 | 17,1 | 27,1 |
| | Shear | V_{rec} | [kN] | 2,9 | 5,1 | 8,6 | 12,0 | 21,7 |
| A4-70 | Tensile | N_{rec} | [kN] | 5,3 | 9,9 | 12,2 | 17,1 | 27,1 |
| | Shear | V_{rec} | [kN] | 3,2 | 6,0 | 9,2 | 13,7 | 25,2 |

Free Anchor Design Software for Structural Safety!



B+BTEC DesignFiX® Anchor Design made Easy!

Input Freedom & 3D User Interface


B+BTEC DesignFiX® offers complete freedom to select an anchor pattern and base plate configuration, as well as the position and direction of load combinations. Changes are made directly into the 3D user interface.

Anchor Type Comparison

B+BTEC DesignFiX® displays the usability of the various anchor types (according to ETAG-001, Annex A, TR029), including the values for each load type. This allows you to compare the calculation results of the different anchor types in a single easy to read panel.

Calculation Effective Anchorage Depth

When selecting an Injection Mortar B+BTEC DesignFiX® allows for the automatic calculation of the most effective anchorage depth, taking in consideration the minimal and maximum values of the ETA.

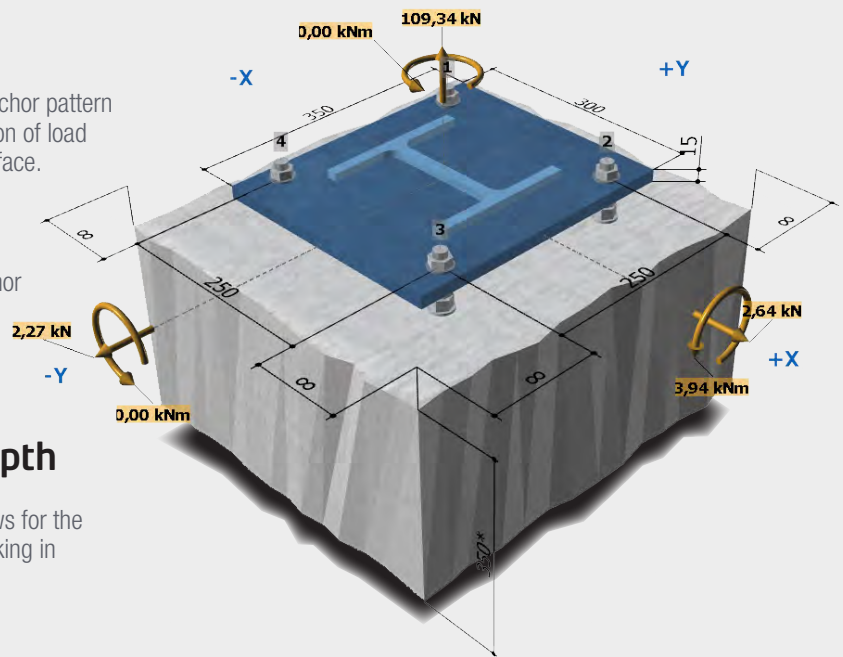


Calculation Base Plate Thickness

The integrated FEM-Calculation Method (Finite Element Method) in B+BTEC DesignFiX® allows you to calculate the base plate thickness based upon the stresses in the base plate in combination with the base plate configuration.



Look for this logo on bbtectoools.com for Anchor Compatibility

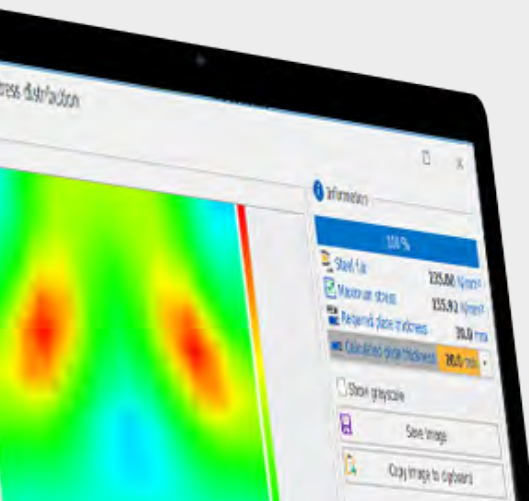

Get your Free Download Link on bbtectoools.com



Munterij 8 • 4762 AH Zevenbergen • The Netherlands
T: +31 - 168 331 260 • E: info@bbtectoools.com
• bbtectoools.com